


Foam Cleaning Equipment

PumpSet Freq. 40-80L IE5



High Pressure, Flow Sw.

Item no.: 89241

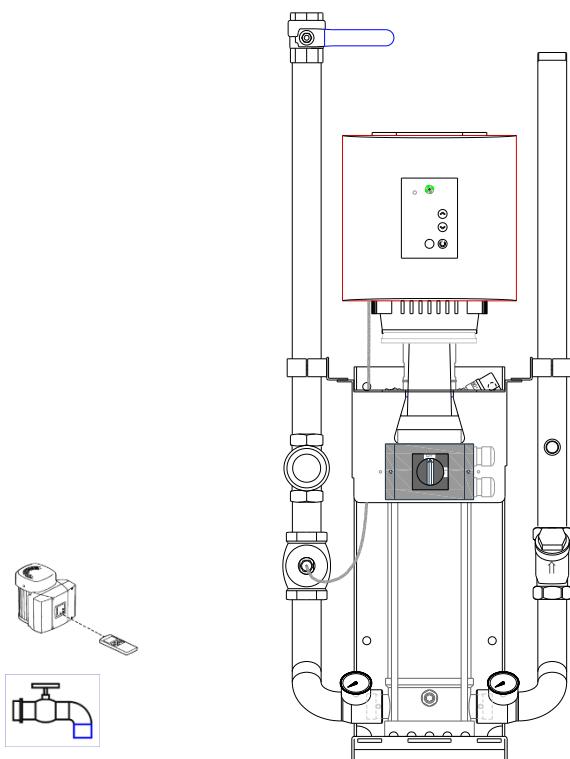

PumpSet Freq. 40-80L IE5, shown with optional GO-remote control

PS Freq. IE5
40-80L

Purpose and use

The Frequency controlled PumpSet Freq. 40-80L IE5 is compact and designed for easy use and service. It is normally floor or wall mounted and is for sites that require cleaning by high pressure.

Basically it is very simple to use. When there is a demand for water, it automatically starts activated by a flow switch. When there is no more need for water, it automatically stops.

It is built for supplying pressure boosted water to Injectors, Aut.Satellites and other cleaning equipment.

Features / benefits

Functions: Frequency controlled automatic booster pump for high pressure cleaning etc. in harsh environment.
Flow Switch Control

Operator friendly: Easy understanding of the functions
LED indicators for status and Alarm

Automatically control: Starts automatically on demand for water. It stops slowly (~30 sec) when there is no need for water.
Motor and pump is over heat protected.

Options: Hand held remote control MI301 / M201.





ScanFoam®



PumpSet Freq. 40-80L IE5

Item no.: 89241

General Description

The Frequency controlled PumpSet Freq. 40-80L IE5 is built to boost the water pressure for foam cleaning equipment such as Injectors etc. The system is made mostly of stainless steel so it is robust against harsh environments.

As standard a non-return valve is mounted in the water outlet to secure the pump and the water supply system against pressure shocks. A filter is mounted in the water Inlet.

The control system automatically starts the pump when there is a demand for water. The frequency control system makes the pump go from OFF to full load in 2,5 second. When there is no need for water it automatically stops slowly. This way of start-up and slow down makes it more comfortable for the cleaning operator. Besides that it avoids high current shock in the power supply system.

The unit is programmable by the optional remote control MI301 / M201 and an App on an Android or iOS smartphone.

Placing Orders and Enquiries

Correspondence concerning new orders or progressing existing orders, contact:

Mr. Anders S. Christensen

Technical enquiries

Enquiries relating to product performance should be directed to:

Mr. Aksel A. Utøft

Mr. Anders S. Christensen

ScanFoam® Cleaning Equipment ApS.

Niels Bohrs Vej 29b, Stilling
8660 Skanderborg
Denmark

Telephone: +45 86 57 25 99

Fax: +45 86 57 20 86

E-mail: anders.christensen@scanfoam.com
order@scanfoam.com

Specifications

Working area: Pressure boost range min/max:
Flow max at 31 bar boost.
No. of users flushing 23-25L/min.

32 -> 41 bar
85 l/min
1 - 3

Water inlet: Connection:



1½" BSP (Female)
3 bar
7 bar
2,5 bar
65 °C

Limitation: Min. feed pressure at full flow
Max. feed pressure
Pressure guard limit on inlet
Max. temperature

Example: 5 bar inlet pressure and 31 bar boost give a total of 36 bar

3x400 VAC 50Hz

Power supply Power consumption max. 6,0 kW
Backup fuse size Aut./T. Max. 25 Amp
Re. dimensioning, always use the local rules.

~110 kg

Weight: Alarm: Motor over heated; phase drop out
Pump temperature overheat

Information: Red and green LED
Pressure guard on water inlet

Alarm, Stand by, Running

86762

Options:

89719: Cover complete for 40-80L FreQ
Stand: Feet for floor standing.
PLC control The PumpSet has several options for remote control.
MI301 Handheld remote programming and reporting unit by the Grundfos GO App.

