


Foam Cleaning Equipment Aut. Sat. Supply 3P

Central chemical product supply

Item no.: 88554

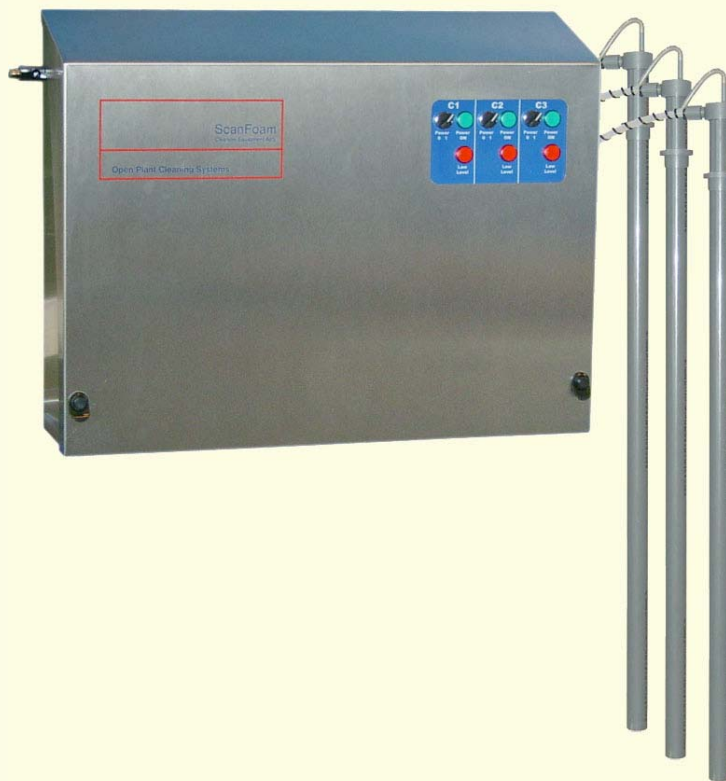

0-3 Bar

Purpose and use

The Sat. Supply 3P is a central automatic pump station for 3 products. It is for concentrated cleaning products. It is energised by compressed air and controlled by solenoid valves. Power supply for the control panel is available from ScanFoam PumpSet's

The product is sucked up by level tubes, and if a product container is empty, the Sat. Supply stops automatically. An alarm is shown on the operator's panel.

The outlet pressure is adjustable. See specification next page.

The materials in contact with the product are corrosion resistant.

Features / benefits

Functions:	Supply all kind of cleaning equipment with cleaning products.
Operator friendly:	Easy understanding of the functions.
Flexible:	Capable of supplying all kind of cleaning products based on acid to base. Also low concentrated chlorine is possible.
Variable:	Adjustable outlet pressure.
Long level tube:	Level tube for 800 or 1000 litre containers.



General Description

The Aut. Sat.Supply 3P is an automatic pump station for concentrated cleaning products. It is energised by compressed air and controlled by solenoid valves. Power supply for the control panel is available from a ScanFoam PumpSet's.

The product is sucked up by level tubes. If the product container is empty, the Sat.Supply stops automatically. An alarm is shown on the operator's panel.

The outlet pressure is adjustable. The materials in contact with the product are corrosion resistant.

Ordering Information

All orders will be acknowledged by fax, unless other special arrangements have been made. Shipping: All correspondence concerning shipping, should be directed: Mrs. Lene Wittendorf

Placing Orders and Enquiries

All correspondence concerning new orders or progressing existing orders, should be directed to:

Mr. Anders S. Christensen or Mrs. Lene Wittendorf

Technical enquiries:

Enquiries relating to product performance should be directed to:

Mr. Aksel A. Utoft or Mr. Anders S. Christensen

ScanFoam® Cleaning Equipment ApS

Niels Bohrs Vej 29b, Stilling

8660 Skanderborg

Denmark

Telephone: +45 86 57 25 99

Fax.: +45 86 57 20 86

E-mail: anders.christensen@scanfoam.com

lene.wittendorf@scanfoam.com

Specifications

Chemical inlet:

Connection inlet: Hose $\phi 9/\phi 12$: 3 x Level tube
 Limitation: Max. temperature: 30°C

Chemical outlet

Connection: 3 x 1/4" BSP Female
 Flow max: 3 x 15 l/min
 Pressure range normal: 0-3 Bar
 Pressure setting default: 1,5 Bar

Air inlet:


Connection: 1/4" BSP Female
 Limitation: Min. feed pressure: 1,5 bar
 Max. feed pressure: 10 bar
 Air consumption max: 24 Nm³/h

Power supply

Inlet: 24 VAC
 Power consumption max: 30 W

Weight:

40 kg

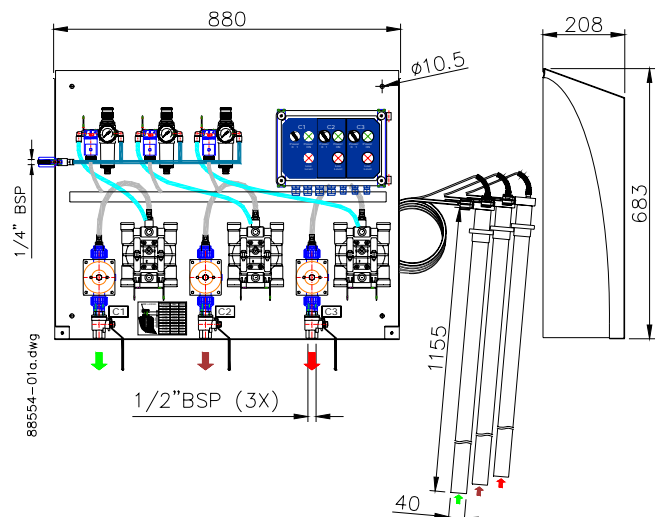

Optional accessories: 84211 Adjustable Non-Return valve (1 product) or 80681 Selector (3 products)

Note! The Aut.SatSupply must stop when the water pressure boosting PumpSet stops.