


Foam Cleaning Equipment Injector LP 3-10 2P

Low Pressure

Item no.: 88602



ScanFoam®

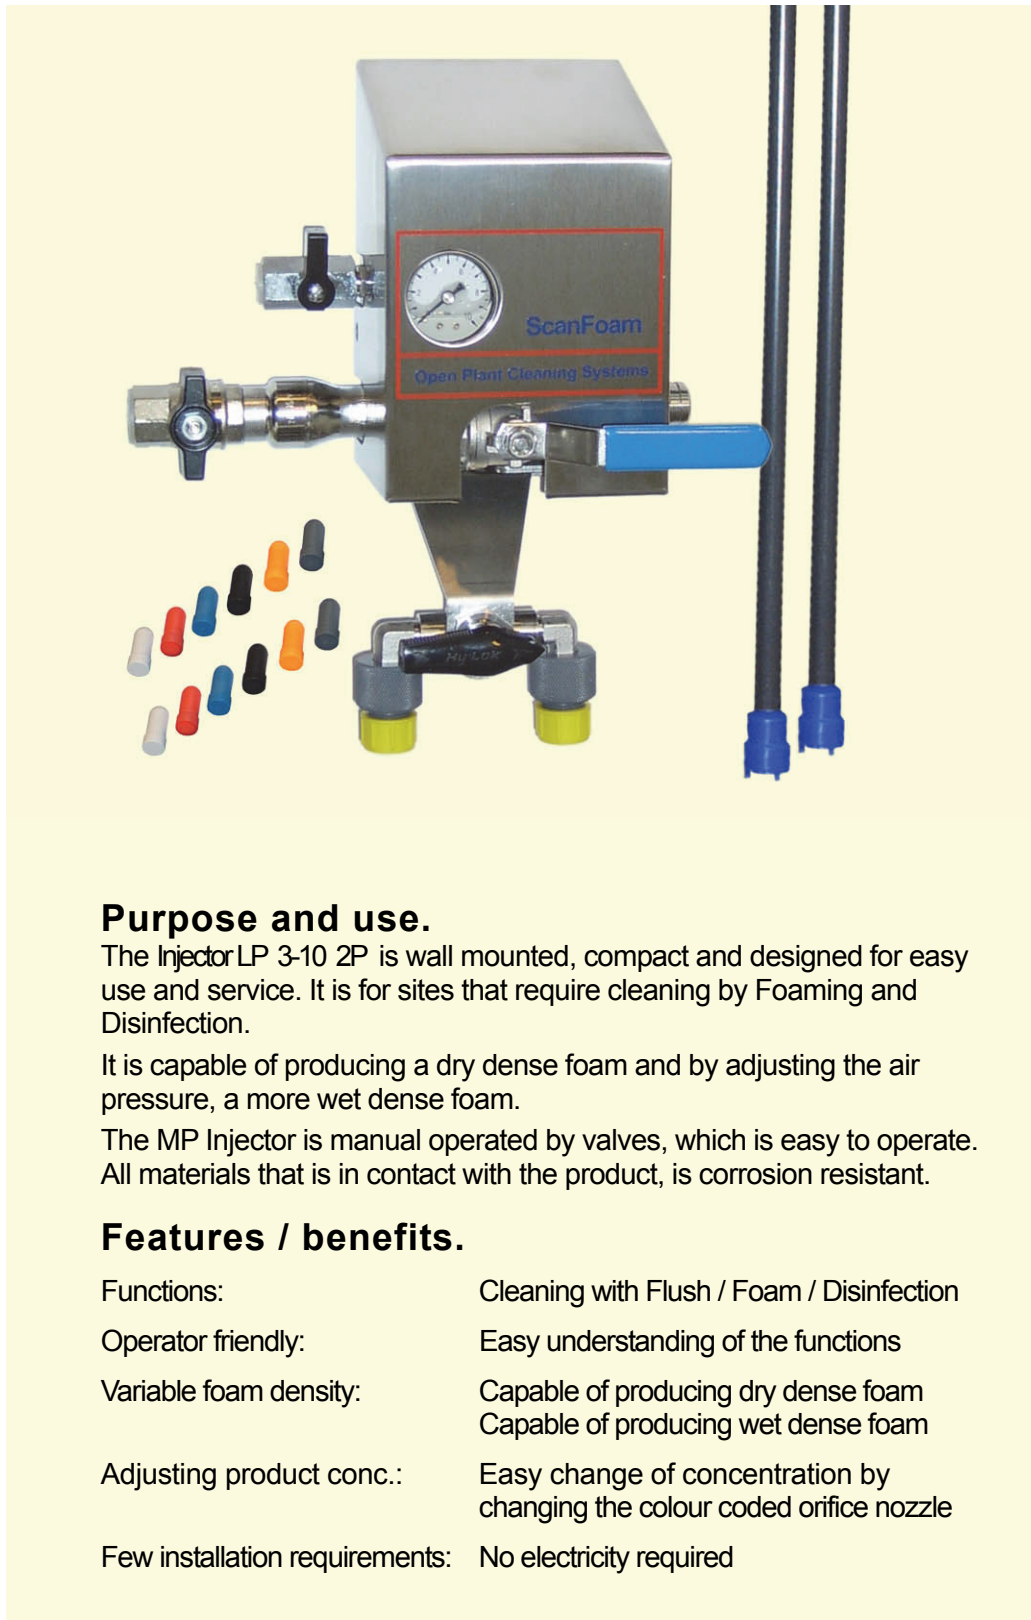

3-10 Bar

Purpose and use.

The Injector LP 3-10 2P is wall mounted, compact and designed for easy use and service. It is for sites that require cleaning by Foaming and Disinfection.

It is capable of producing a dry dense foam and by adjusting the air pressure, a more wet dense foam.

The MP Injector is manual operated by valves, which is easy to operate. All materials that is in contact with the product, is corrosion resistant.

Features / benefits.

Functions:	Cleaning with Flush / Foam / Disinfection
Operator friendly:	Easy understanding of the functions
Variable foam density:	Capable of producing dry dense foam Capable of producing wet dense foam
Adjusting product conc.:	Easy change of concentration by changing the colour coded orifice nozzle
Few installation requirements:	No electricity required



General Description

The Injector LP 3-10 2P works like a hydraulic foam cabinet, (the Injector is essentially a “static pump”). Injectors work on the principle of a pressure differential: A vacuum is created which pulls “or pumps” the product into the mixing chamber. As standard, a non-return valve is mounted in the water inlet.

Ordering Information

Shipping: All correspondence concerning shipping, should be directed to:

Mrs. Lene Wittendorf

Placing Orders and Enquiries:

All orders will be acknowledged by fax, unless other special arrangements have been made.

All correspondence concerning new orders or progressing existing orders, should be directed to:

Mr. Anders S. Christensen
Mrs. Lene Wittendorf

Technical enquiries:

Enquiries relating to product performance should be directed to:

Mr. Aksel A. Utoft
Mr. Anders S. Christensen

ScanFoam® Cleaning Equipment ApS.
Niels Bohrs Vej 29b, Stilling
8660 Skanderborg
Denmark

Telephone:

+45 86 57 25 99

Fax:

+45 86 57 20 86

E-mail:

anders.christensen@scanfoam.com
info@scanfoam.com

Specifications

Water inlet:	Connection:	1/2" BSP (Female)
Limitation:	Min. feed pressure	3 bar
	Max. feed pressure	10 bar
	Max. temperature Injector	70 °C
Water consumption with hose: 30m 3/4"		
	Flushing at 5 bar 40L/min nozzle	17 l/min
	Flushing at 8 bar 40L/min nozzle	22 l/min
	Foaming at 5 bar, 150L/min nozzle	7 l/min
	Foaming at 8 bar, 150L/min nozzle	9 l/min
Air inlet:	Connection	1/4" BSP Female
Limitation:	Min. feed pressure	6 bar
	Max. feed pressure	10 bar
Air consumption at 6 bar		150 l/min
Prod. inlet:	Connection:	2 x suction tube.
Dosing range		1-6%
Outlet:	Connection:	3/4" Hose Nipple
Max. length 3/4" hose		10 meter
Weight:		6 kg

Options: Set of accessories:
Item no. 80146
(Max. temperature hose: 55°C)

